

HUB1408

DIGITAL MATRIXES

8 outputs digital zoner with DSP



PRODUCT OVERVIEW

HUB1408 is a digital zone manager with 14 inputs and 8 outputs. It has the HANGAR embedded web-server application (control from standard web browser in Windows / MacOS, etc.) for its configuration; remote control from physical wall installation panels, call (paging) stations and applications for mobile devices (Android, iOS). Includes DSP with specific functions for both inputs and outputs.

HUB Series offers multiple possibilities, being intuitive and easy to configure. From the least experienced user to the most expert, you can set up a professional audio installation in a matter of minutes (Plug & Play). It is the perfect solution for any type of sound that requires managing and controlling different zones.

KEY FEATURES

- 14 inputs, 8 outputs digital zoner with integrated DSP
- Easy programming and control by embedded web application, HANGAR, and standard web browser
- Control from the front panel and user remote control by:
 - eMCONTROL1 wall panels (up to 8)
 - eMPAGE paging consoles (up to 2)
 - Ecler pilot application, compatible with Android and iOS: control graphic panels set to user needs (pilot panels)
 - TP-NET protocol (RS-232 interface with DB9 connector) for control and integrating with third party systems
- Control available, by zone (output): selection of audio source (input), volume adjustment and MUTE, 3 band tone adjustment and general volume
- Four priority levels, ducker/pager functions
- Available DSP: frequency shifter, link stereo, delay, crossover filters, 8-band graphic EQ, compressor/limiter and much more
- Predefined setups for a quick installation (plug and play)
- MUTE port can be activated by closing the external dry contact, affecting programmed outputs to this effect.

APPLICATIONS

- Commercial
- Hospitality
- Education
- Corporate
- Sports and wellness

ACCESSORIES & COMPATIBLE DEVICES

- eMPAGE
- eMCONTROL1



eMPAGE



eMCONTROL1

TECHNICAL SPECIFICATIONS

HUB1408

DIGITAL		
DSP		
CPU		Floating point 32/64bit
Sampling rate		48 kHz
Latency		<1.5 ms.
Converters		
Resolution		24 bit, AKM
Dynamic range		AD:111dB, DA: 115dB
ANALOGUE		
Input 1, 2 (Line)		
Sensitivity		+5 / -15dBV External potentiometer adjustment
Impedance		>13k
Input headroom		12dBV
Connector		RCA female with Euroblock stack
Type		Unbalanced
Input 3, 4, 5 ,6 (Mic/Line)		
Sensitivity		+0 / -50dBV External potentiometer adjustment
Impedance		>24k electronically balanced
Input headroom		12dBV
Connector		Euroblock (Symmetrical)
Type		Balanced
Pagers		Input 5 and 6 (by RJ45 connector)
Phantom		+48VDC (rear panel switch)
CMRR		>60dB (20Hz - 20kHz)
Input 7 to 14 (Remote Input)		
Sensitivity		0dBV without adjustment
Impedance		>24k electronically balanced
Input headroom		12dBV
Connector		RJ45 Connector
Type		Balanced
CMRR		>60dB (20Hz - 20kHz)
Outputs 1 to 8 (Line)		
Max output level		12dBV
Connector		Euroblock 3-pin
Type		Balanced
Headphones output		
Selectable output		From Out1 to Out8
Power		>200mW – 2000Ω
Connector		Mini-Jack 3,5mm
General		
External mute		Normally open. Assignable to any output zone
Frequency response		<10Hz ~ 20kHz (+0dB / -0.5dB)
Output noise floor (FFT)		>110dB (from 20Hz to 20kHz)
THD + Noise)		< 0.005% (1kHz, 1Vrms)
Crosstalk		>90dB, 20Hz - 20kHz
CMRR		>60 dB Typical
Flatness		Better than ±0.1dB






PROCESSING		
Input level (x14)		
Volume		From Off to 0 dB
Mute		On-Off
Metering		Vumeter post fader
Stereo		On-Off (Inputs 3 to 6)
Polarity		On-Off
High pass filter		50Hz to 150Hz (Inputs 3 to 6)
Frequency shifter		On-Off ; 5Hz (Inputs 3 to 6)
Noise gate (x4)		
Inputs		Input 3 to 6, Bypass ON - OFF
Threshold		From -80dBV to +12dBV
Depth		From 0 dB to 80 dB
Attack		From 0.1ms to 500ms
Hold		From 10ms to 3000ms
Release		From 10ms to 1000ms
Input EQ (x14)		
Type		Baxandall 3 way EQ
Gain		-10dB ~ +10dB in 0.1dB steps
Frequency		Low 200Hz Mid 1kHz High 6.3kHz
Output level (x8)		
Volume		From Off to 0 dB
Mute		On-Off
Metering		Vumeter post fader
Stereo		On-Off
Polarity		On-Off
Output EQ (x8)		
Type		Baxandall 3 way EQ
Gain		-10dB ~ +10dB in 0.1dB steps
Frequency		Low 200Hz Mid 1kHz High 6.3kHz
Output graphic EQ (x8)		
Type		8-Band Graphic EQ
Gain		-10dB ~ +10dB in 0.1dB steps
Frequency		63Hz, 125Hz, 250Hz, 500Hz, 1kHz, 2kHz, 4kHz, 8kHz
Output compressor (x8)		
Bypass		On-Off
Mode		Compressor / Limiter
Threshold		-36 dB to +12 dB
Ratio		1 to 100
Knee		Soft / Hard
Attack		0.1ms to 500ms
Release		10ms to 1000ms
Make-up gain		0 dB to 10 dB
Output delay (x8)		
Outputs		1 to 8
Bypass		On-Off
Delay		0 to 300ms
Unit		ms, meters, feet

Output crossover (x8)		
Outputs	1 to 8	
Bypass	On-Off	
Mode	High Pass Filter / Low Pass Filter	
Frequency	20Hz to 20kHz	
General volume		
Volume	From Off to 0dB	
Selectable outputs	Out 1 – Out 8	
Ducker		
Input	IN3 to IN6. In 5 and 6 selectable: DUCKER or PAGER	
Outputs	Selectable: 1-8 zones	
Priority	Four levels (1max-4min)	
Priority volume	-40 dB to +6 dB	
Threshold	-80dB to +12dB	
Depth	0dB to 80 dB	
Attack	5ms to 2000ms	
Release	50ms to 3000ms	
Hold	10ms to 3000ms	
Pager		
Input	IN5 and IN6 selectable: DUCKER or PAGER	
Outputs	Selectable: 1-16 zones	
Functions	Two function buttons (F1, F2)	
Priority	Four levels (1max-4min)	
Priority volume	-40 dB to +6 dB	
Chime volume	-12dB to +0dB	
Chime melody	None, Melody 1, Melody 2	
Depth	0dB to 80 dB	
Attack	5ms to 2000ms	
Release	50ms to 3000ms	
Pilot panels		
General	On-Off, Public, Label, Users and Zone	
Volume control	On-Off, Label and Style	
Source selection	On-Off, Label and Allowed sources	
Equalizer	On-Off, Label, and Style	
Color	Controls, Text and Background	
OTHERS		
Mechanical		
Dimensions (WxHxD)	482.6 x 88.0 x 200.0 mm / 19.0 x 3.5 x 7.9 in.	
Weight	3,60kg / 7.93 lb.	
Power supply		
Mains	90-240 VAC, 50-60Hz	
Power consumption	20W	
Connectivity		
Management Connectivity	Ethernet Base-Tx 10/100Mb Auto X-Over CAT5 up to 100m	
Remote bus	RS485	
Aux. Power Supply for Remotes	+12VDC, 0,6A max. (short circuit protected)	
Programming and control	Hangar (embedded web application), Ecler pilot (Android/iOS application), TPNET (UDP/RS232)	

MECHANICAL DIAGRAMS



Ecler HUB1408 Mechanical Diagram

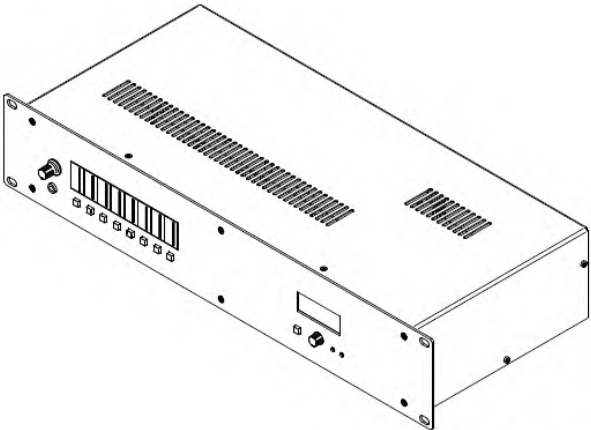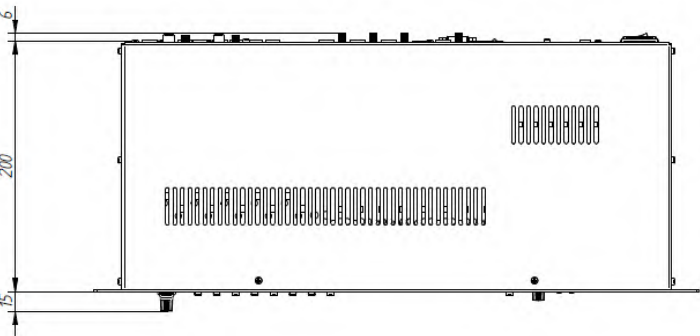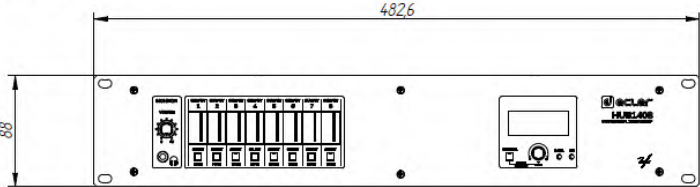

61-1022-0100

www.ecler.com

All the measurements are in mm

A&E SPECIFICATIONS

The Multi-Zone audio system shall comprise of 8 independent controllable output zones, 6 audio inputs, containing 4 balanced microphone inputs with priority function and phantom power possibility, and 8 remote audio inputs with RJ45 connection. The zone outputs shall be balanced and equipped with Terminal Block connectors.

Native remote management shall be available via smart devices, standard Internet browser and remote wall-panels. Remote control from third-party systems shall be available using TP-NET control protocol through Ethernet or RS-232 ports. The digital zoner shall include a factory setup and predefined configuration management for a plug & play installation. The system shall include an integrated web-server for device's configuration, on which a fully functional web-based user interface is running, which can be accessed through a web browser without installing additional software.

On the front panel, the zoner shall include Power ON and Data status LEDs, outputs signal level indicator, monitor output jack and monitor level knob. On the rear panel, the matrix shall include power on switch, 2 unbalanced stereo inputs with Euroblock and RCA connectors, 4 balanced mic/line inputs with Euroblock connector, 2 pager RJ45 ports, phantom switch, 8 RJ45 remote inputs and 8 zone outputs with Euroblock connector. Also, a MUTE dry contact, RS-232 port (DB9 connector) and Ethernet RJ-45 port.

All internal processing shall be digital (DSP). Audio conversion shall have a resolution of 24-bit, and sampling rate should be 48 kHz in an architecture of 32/64 bit. The dynamic range shall not be lower than 111 dB for AD conversion and 115 dB for DA conversion. Possibilities at the inputs shall include: treatment of channels in mono or stereo mode, phase adjustment, feedback suppressor algorithm, high-pass filter, noise gate, level adjustment, mute and level indicators. Possibilities at the outputs shall include: treatment of channels in mono or stereo mode, phase adjustment, external MUTE, 8 band parametric EQ, delay, compressor / limiter, crossover filter, level adjustment, mute and vumeters level indicators. In addition, 4 priority modules management including 2 physical paging consoles.

The zoner shall operate on a 100-240V AC - 50/60 Hz mains network and shall be equipped with a removable power cord having a standard shuko (CEE 7/7) AC plug. The connector on the zoner chassis shall be a fused IEC C14 type. The zoner chassis shall be a two rackspace 19" housing. Depth from mounting surface to rear supports shall be 200 mm and the weight shall not exceed 3,60 Kg.

The digital zoner shall be the ECLER HUB1408.



All product characteristics are subject to variation due to production tolerances. **NEEC AUDIO BARCELONA S.L.** reserves the right to make changes or improvements in the design or manufacturing that may affect these product specifications.

For technical queries contact your supplier, distributor or complete the contact form on our website, in [Support / Technical requests](#).

Motors, 166-168 | 08038 Barcelona, Spain | (+34) 932238403 | information@ecler.com |