

Overview

Highly adaptable surface mount speakers for a wide range of applications, creating appealing acoustic spaces



Features

- Highly adaptable surface mount speakers
- Flexible mounting for easier configuration
- Pursuing the best sound for installation
- Paintable speakers for your unique room design
- Selectable 70V/100V for distributed lines, or low impedance
- Designed for both indoor and outdoor use (IP rating 35)
- Black and white models available

Specifications

General Specifications

System Type		2-way, Bass-reflex
Components	LF	8" Cone
	HF	1" Soft dome
Frequency Range	(-10dB)	51Hz - 20kHz
Crossover Frequency		2.8kHz
Coverage Angle (Horizontal x Vertical)		100° x 100°
Nominal Impedance		8Ω
Transformer Taps	70V	60W (83Ω), 30W (170Ω), 15W (330Ω), 7.5W (670Ω)
	100V	60W (170Ω), 30W (330Ω), 15W (670Ω)
Power Rating	NOISE	90W
	PGM	180W
	MAX	360W
Sensitivity (1W, 1m)		91dB SPL
Maximum SPL (Calculated, 1m)		117dB SPL
Connectors		1x Euroblock (4P) (Input: +/-, Loop Thru: +/-)
Material, Finish, Color		Black, White
Dimensions (W x H x D)		278mm x 430mm x 239mm (10.9" x 16.9" x 9.4")
Net Weight		8.2kg (18.1lbs)
Packaging		Pair
IP Rated		IP35
Certificate		UL1480, NFPA70, CE, EAC, RoHS

* Frequency range: Half space

* Nominal coverage: 500Hz-4kHz Average

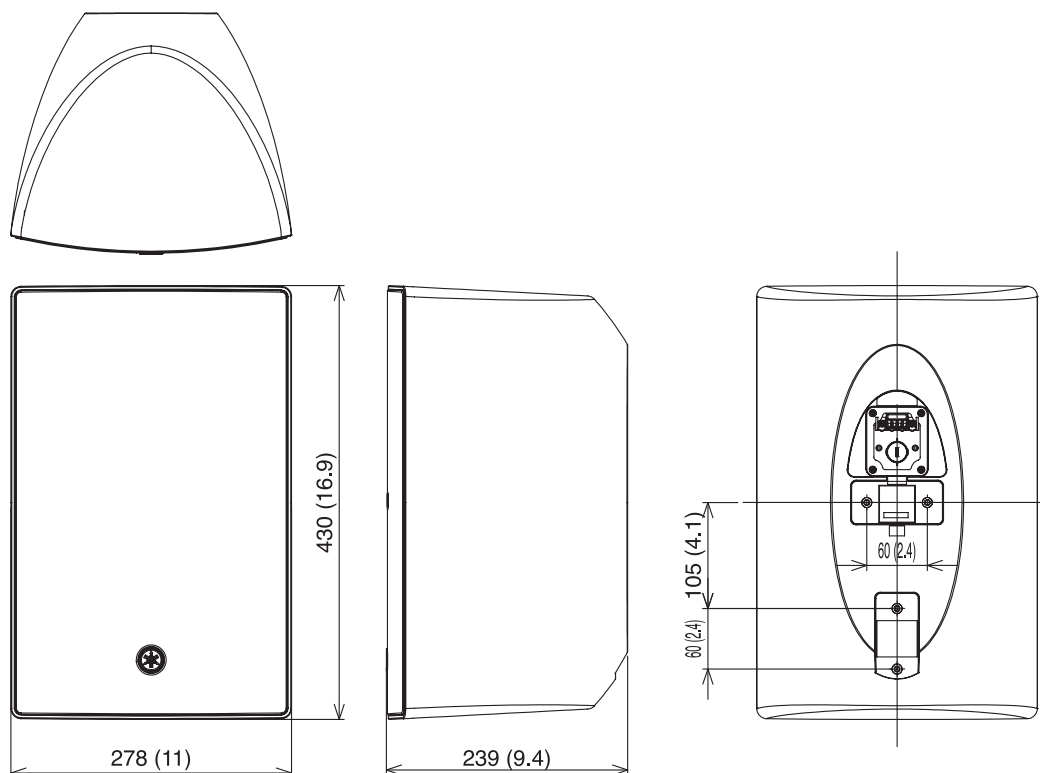
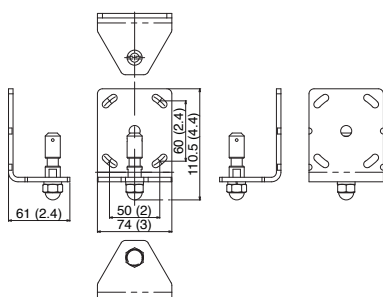
* Power rating: IEC

Accessories

Included Accessories	Wall/Ceiling Mount Bracket, Terminal Cover
----------------------	--

Dimensions

Unit: mm (inch)


Bracket Base

Mounting Bracket
