


100ICW8

Product Data Sheet

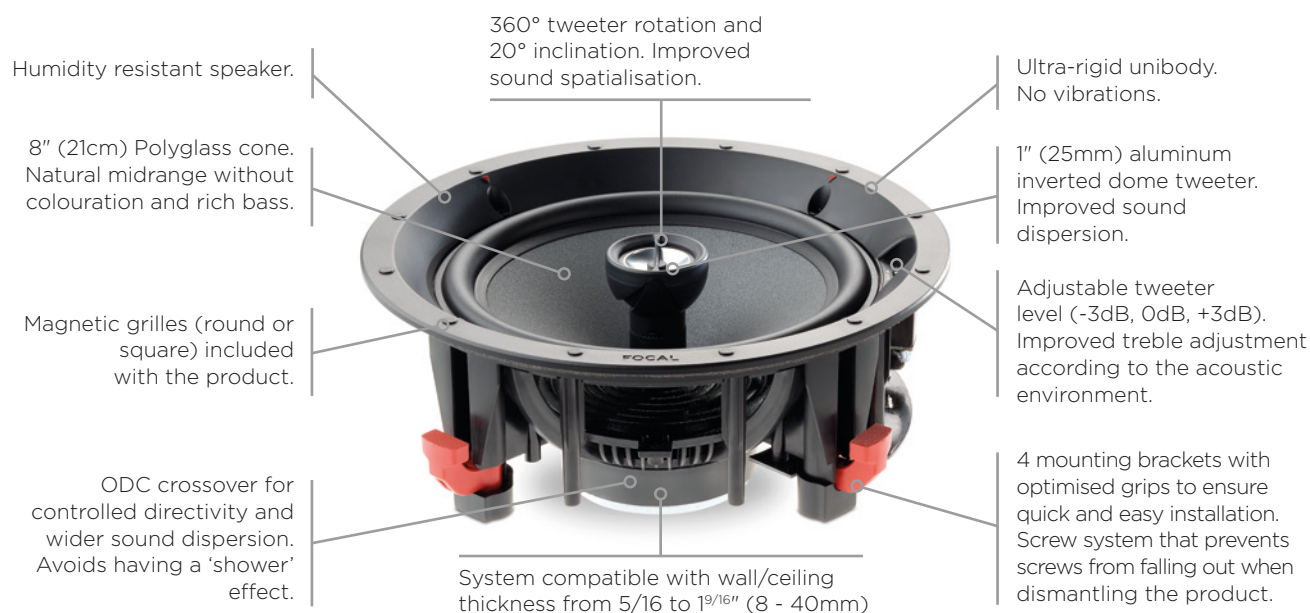

Key Points

- Product designed and developed in France by Focal
- Compact product with shallow mounting depth
- For in-ceiling or in-wall loudspeakers (1 product, 2 uses)
- Possible to connect two loudspeakers to the same amplifier output
- Ready-to-paint grille

Technical Specifications

Type	In-wall/In-ceiling 2-way coaxial
Drivers	8" (21cm) Polyglass Midbass. 1" (25mm) Al inverted dome Tweeter
Sensitivity (2.83V/1m)	90dB
Frequency response (+/-3dB)	53Hz-23kHz
Low frequency point (-6dB)	40Hz
Nominal impedance	8Ω
Minimal impedance	6,9Ω
Recommended amplifier power	25-150W
External dimensions (Ø/Depth)	9 ^{3/4"} x 4 ^{3/8"} (248x111mm)
Cut-Out diameter	8 ^{13/16"} (224mm)
Depth from wall	4 ^{3/16"} (107mm)
Net weight (with front grille)	3.86lbs (1.75kg)
Packing dimensions (WxDxH)	12 ^{3/16"} x 12 ^{3/16"} x 7 ^{1/4"} (310x310x185mm)
Total weight (with packaging)	4.73lbs (2.60kg)



