



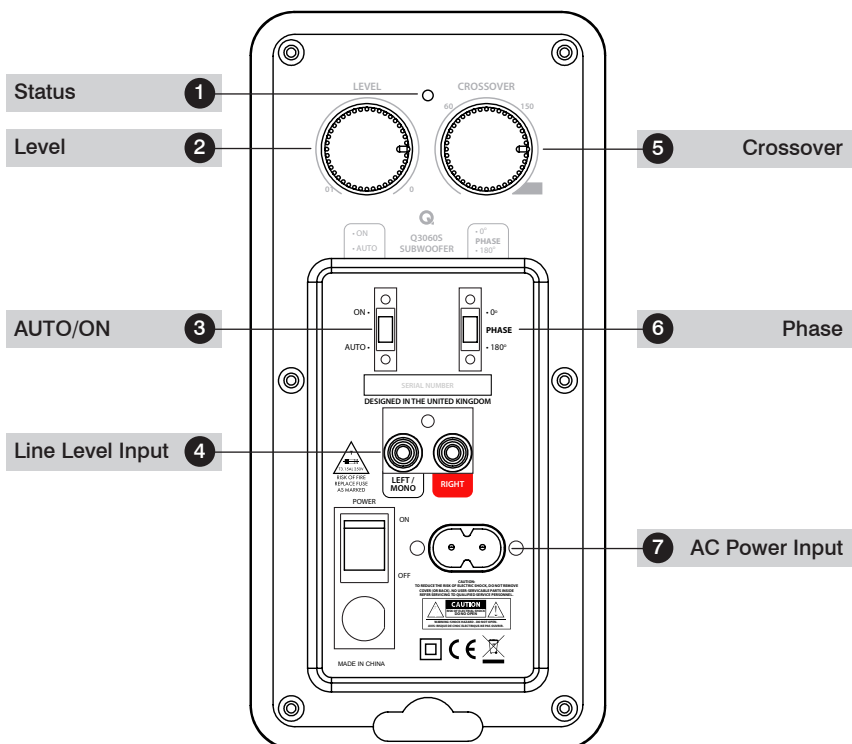

3060S

Controls and Connections

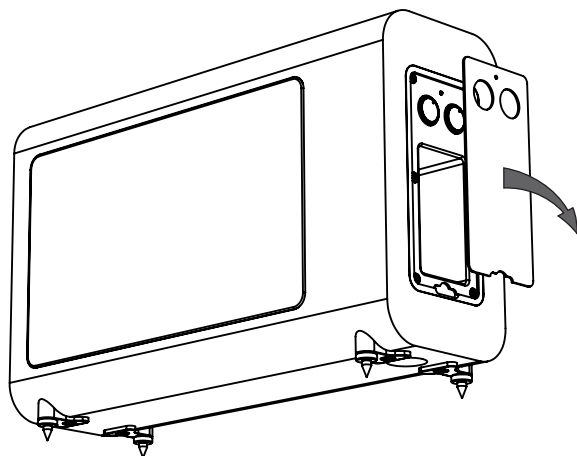

Specifications



Passive Loudspeakers

Enclosure type:
 Bass unit:
 Treble unit:
 Frequency response (+3 dB, -6 dB):
 Average impedance:
 Minimum impedance:
 Sensitivity (2.83v@1m):
 Stereo amplifier power:
 AV receiver power (2 ch. driven):
 Crossover frequency:
 Effective volume:
 Enclosure dimensions (WxHxD):
 (inc. grille, terminal and feet)
 Enclosure width:
 Weight (per speaker):


3010i

2-way reflex
 100 mm (4.0 in)
 22 mm (0.9 in)
 65 Hz - 30 kHz
 6 Ω
 4 Ω
 86 dB
 15 - 75 W
 50 - 125 W
 2.6 kHz
 4.0 L (244 cu in)
 150 x 253 x 252 mm
 (5.9 x 10.0 x 10.0 in)
 4.1 kg (9.0 lbs)



3020i

2-way reflex
 125 mm (5.0 in)
 22 mm (0.9 in)
 64 Hz - 30 kHz
 6 Ω
 4 Ω
 88 dB
 25 - 75 W
 50 - 125 W
 2.4 kHz
 6.1 L (372 cu in)
 170 x 278 x 282 mm
 (6.7 x 11.0 x 11.1 in)
 5.5 kg (12.1 lbs)



Active Subwoofer

Enclosure type:
 Bass unit:
 Amplifier power:
 Frequency response (+3 dB, -6 dB):
 Crossover frequency:
 Effective volume:
 Enclosure dimensions (WxHxD):
 Weight:

3060S

Infinite baffle
 200 mm (8.0 in)
 150 W Class-D
 35 Hz - 250 Hz
 35 Hz - 250 Hz (var.)
 10.6 L (647 cu in)
 480 x 300 x 150 mm (18.9 x 11.8 x 5.9 in)
 324 mm (12.7 in) inc. spikes
 8.5 kg (18.7 lbs)

**3050i**

2-way reflex

2 x 165 mm (6.5 in)

22 mm (0.9 in)

44 Hz - 30 kHz

6 Ω 4 Ω

91 dB

25 - 180 W

50 - 165 W

2.5 kHz

32.4 L (1977 cu in)

310 x 1020 x 310 mm

(12.2 x 40.1 x 12.2 in)

200 mm (7.9 in)

17.8 kg (39.2 lbs)

**3090Ci**

2-way reflex

2 x 100 mm (4.0 in)

22 mm (0.9 in)

75 Hz - 30 kHz

6 Ω 4 Ω

89 dB

25 - 100 W

50 - 165 W

2.7 kHz

6.6 L (403 cu in)

430 x 152 x 216 mm

(16.9 x 6.0 x 8.5 in)

6.0 kg (13.2 lbs)