

F Two (A) Active Subwoofer

Technical Specifications



System Specifications

Frequency Response

Low cutoff -6dB
27 Hz

High cutoff -6dB
85 Hz

SPL

Short term max SPL
≥102 dB

Maximum short term sine wave SPL output averaged from 30 to 85 Hz, measured in half space at 1 meter.

Self-generated noise

Self-generated noise
≤15 dB SPL


Self generated noise level in half space at 1 m on axis (A-weighted).

Weight

Weight
9.8 kg (21.6 lb)

Dimensions

- Height**
300 mm (11 3/4 in)
- Width**
362 mm (14 1/4 in)
- Depth**
362 mm (14 1/4 in)

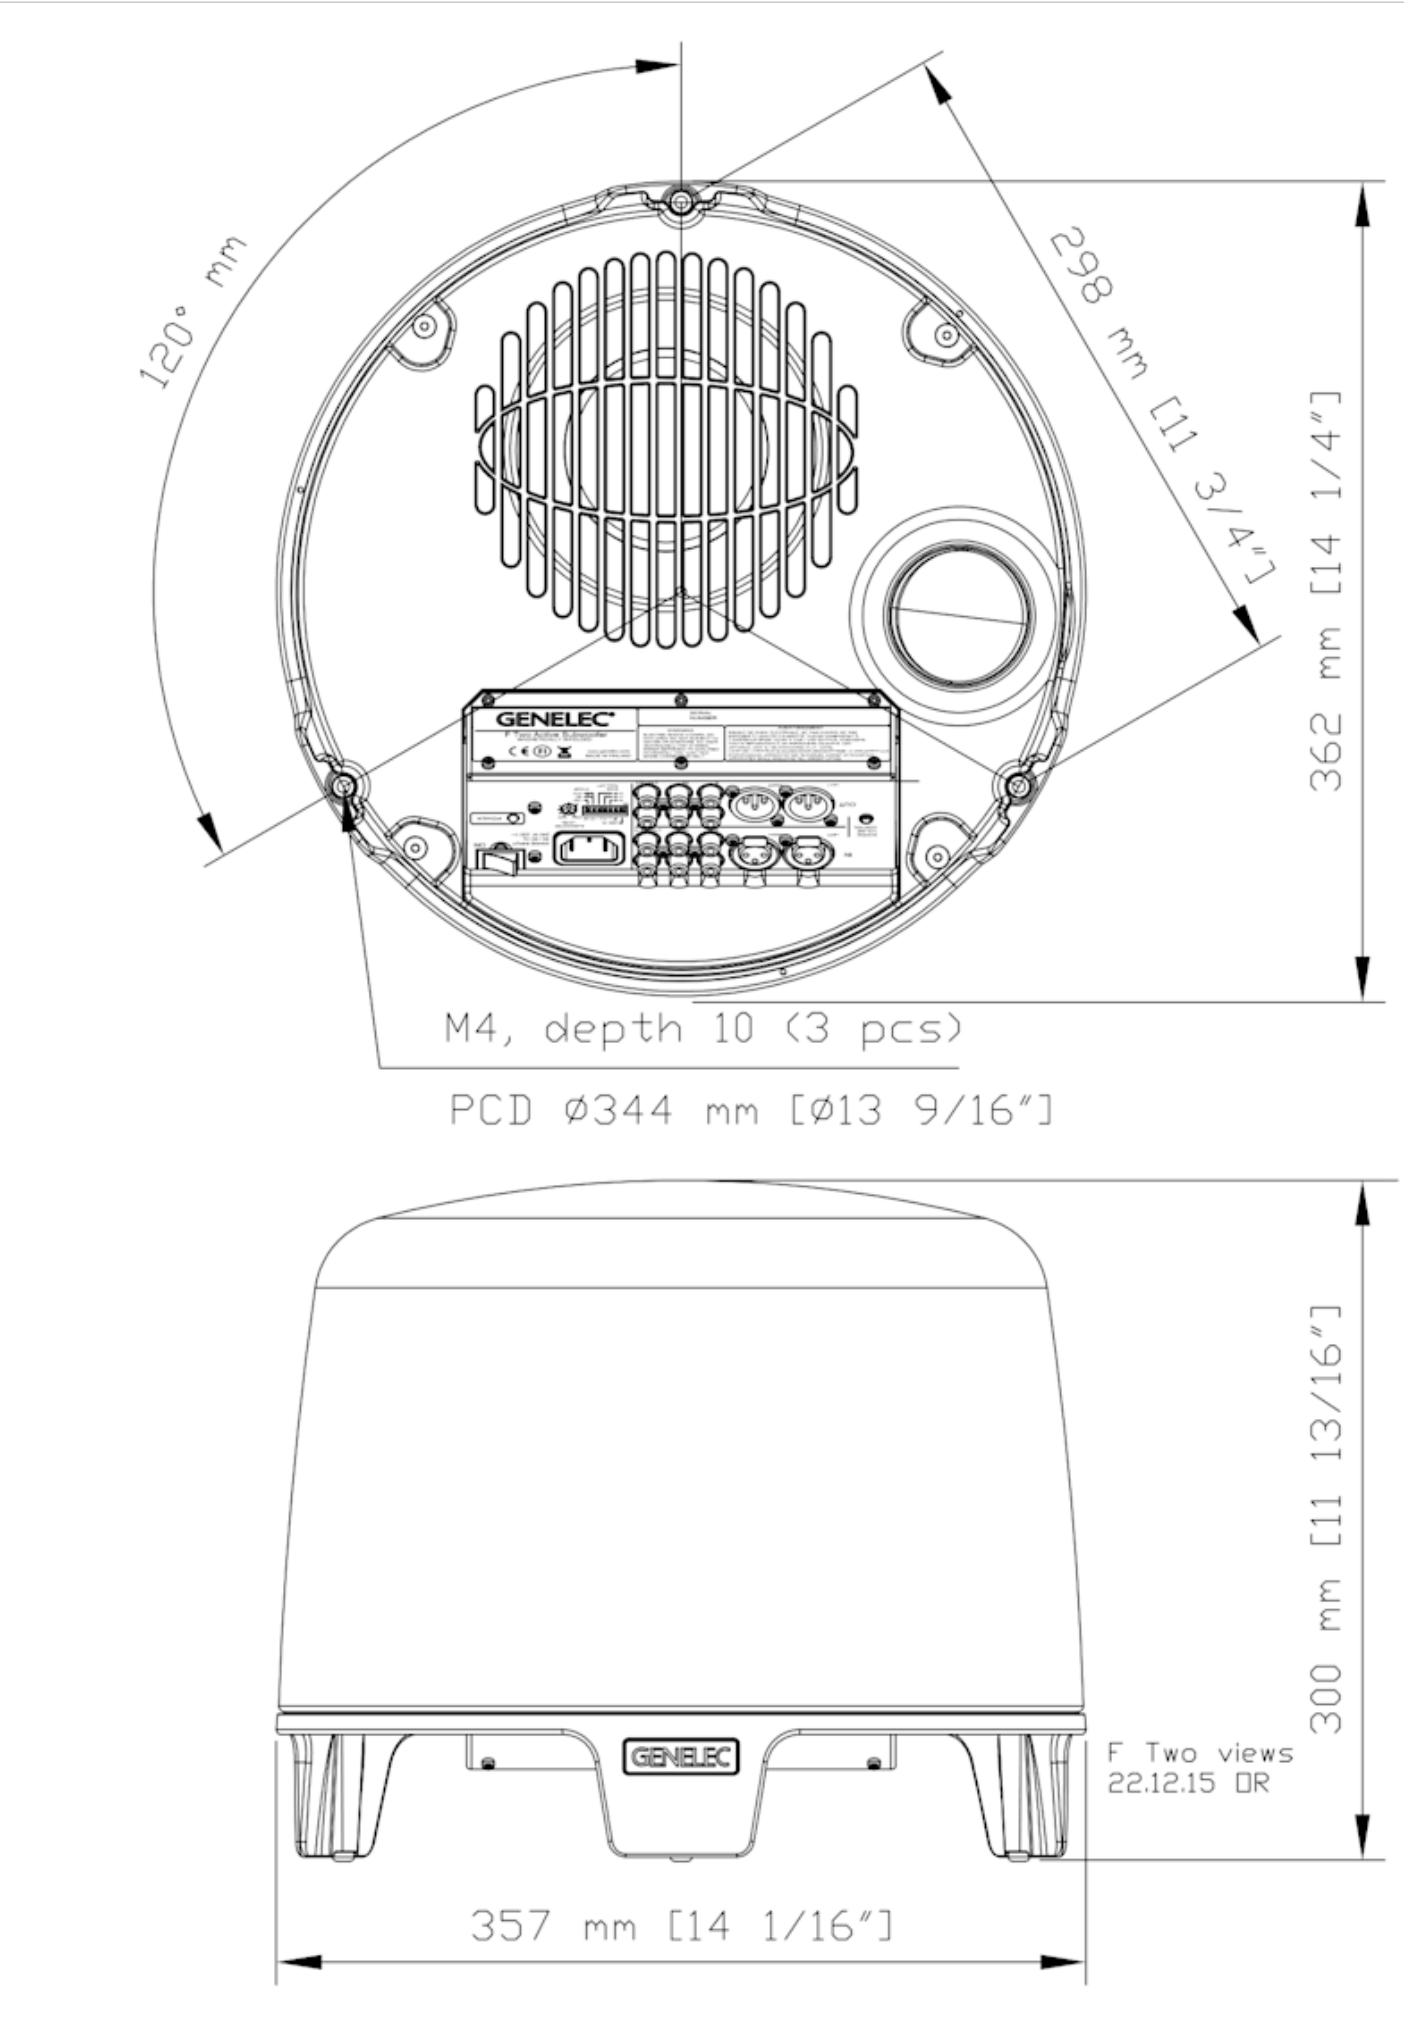

Enclosure

- Enclosure material**
Die cast aluminium

Harmonic distortion

Amplifier Section

Amplifiers

- F Two bass amplifier**
150 W Class D

Mains voltage

100, 120, 220 or 230VAC 50/60Hz according to region

Power consumption

ISS Active ≤0.5 W	Idle ≤12 W	Full output 120 W
----------------------	---------------	----------------------

Signal processing section

Connectors

6 x Input	6 x Output
6 x RCA input connectors (5 + LFE/LINK IN), 10 kOhm.	6 x RCA output connectors (5 + 1 LINK OUT).
2 x Input	2 x Output
XLR input connectors, 10 kOhm.	XLR output connectors, 10 kOhm.

Product Variants

Product codes

Code	Product information	EAN code	CN code
F2AWM	F Two (A) Active Subwoofer White		
F2AMM	F Two (A) Active Subwoofer Black		

For even more technical details please see product operating manual.